
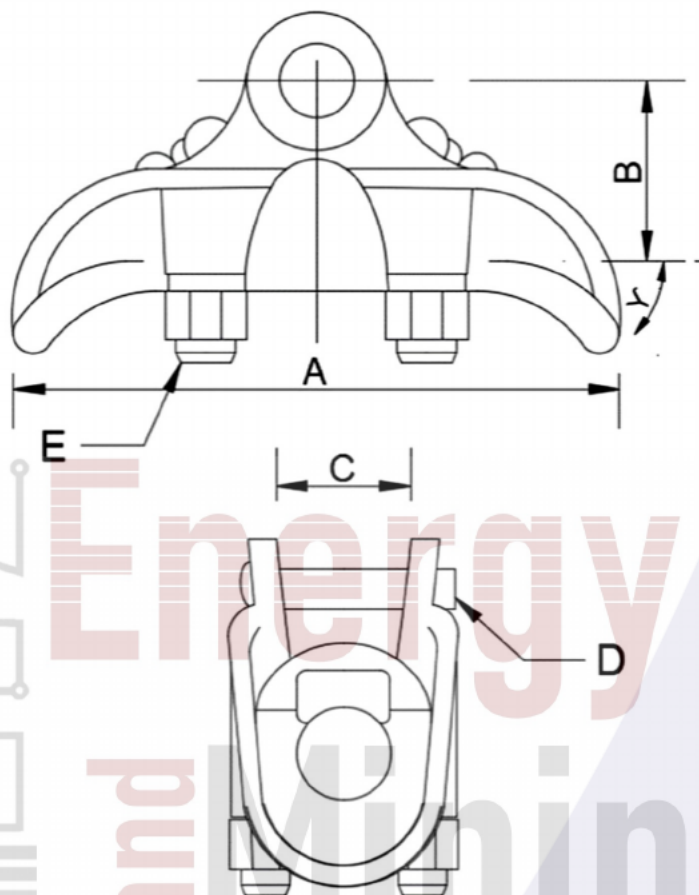


GRAPA DE SUSPENSIÓN DE F° G°



CODIGO	RANGO DE CONDUCTORES		DIMENSIONES (mm)					ÁNGULO DE SALIDA	RESISTENCIA A LA TRACCIÓN	PESO
	Min.	Max.	A	B	C	D	E	Y	KN	Kg
106-1	5.08	15.78	164.97	53.93	19	16	13	30°	71	1.6
106-2	6.35	19.05	164.97	57.1	22.2	16	13	30°	81	2
106-3	10.16	21.84	190.35	60.27	25.4	16	13	30°	81	2.9
106-4	10.16	26.67	190.35	63.45	28.55	16	13	30°	111	4.2

MATERIAL: Hierro nodular
 ACABADO: Galvanizado en caliente
 NORMA: ASTM A-153