
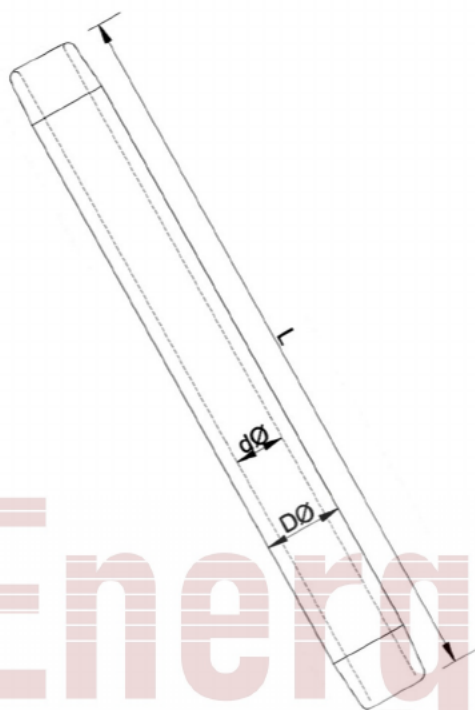


# MANGUITO O JUNTA DE EMPALME



| CÓDIGO | RANGO DE CONDUCTOR | LONGTUD | DIAM. EXTER. | DIAM. INTER. | TRACCIÓN | PESO |
|--------|--------------------|---------|--------------|--------------|----------|------|
|        | mm <sup>2</sup>    | L (mm)  | DØ           | dØ           | KN       | Kg   |
| 116-1  | 16                 | 155     | 13           | 5.2          | 3.75     | 0.37 |
| 116-2  | 25                 | 175     | 14           | 6.5          | 4        | 0.48 |
| 116-3  | 35                 | 205     | 16           | 7.8          | 12.7     | 0.69 |
| 116-4  | 50                 | 225     | 16           | 9.7          | 22.6     | 0.77 |
| 116-5  | 70                 | 255     | 19           | 10.85        | 32.5     | 0.84 |
| 116-6  | 95                 | 275     | 22           | 12.65        | 38.5     | 0.96 |
| 116-7  | 120                | 305     | 25           | 14.65        | 41.25    | 1.05 |
| 116-8  | 240                | 355     | 38           | 20.1         | 55.2     | 1.27 |

MATERIAL: Aleación de aluminio

ACABADO: Extruído

NORMA DE FABRICACIÓN: UNE 21-159, ASTM B-117

